

100.3010 | Single Output Shower W/ Shower Head & Arm



COMPONENTS

- HS1030 - 7 Shower Arm
- 200.6140 - 6 Function Head
- UF.2200T - Shower Trim
- PBV.1005AS - Shower Valve

SHOWER VALVE:

- Pressure balance shower valve
- Valve includes service stops
- Lift handle to control volume
- Turn left for hot, right for cold

SHOWER HEAD:

- 6 function ABS construction
- 1.8 GPM flow rate

STANDARDS:

- ASME A112.18.1/CSA B125.1


See individual component specification sheets on following pages for further details.

HS1030 | Round Shower Arm




SPECIFICATIONS:

- Solid Brass Shower Arm
- With Brass Flange

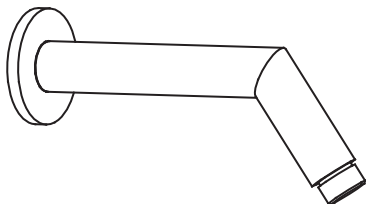


Technical Diagram

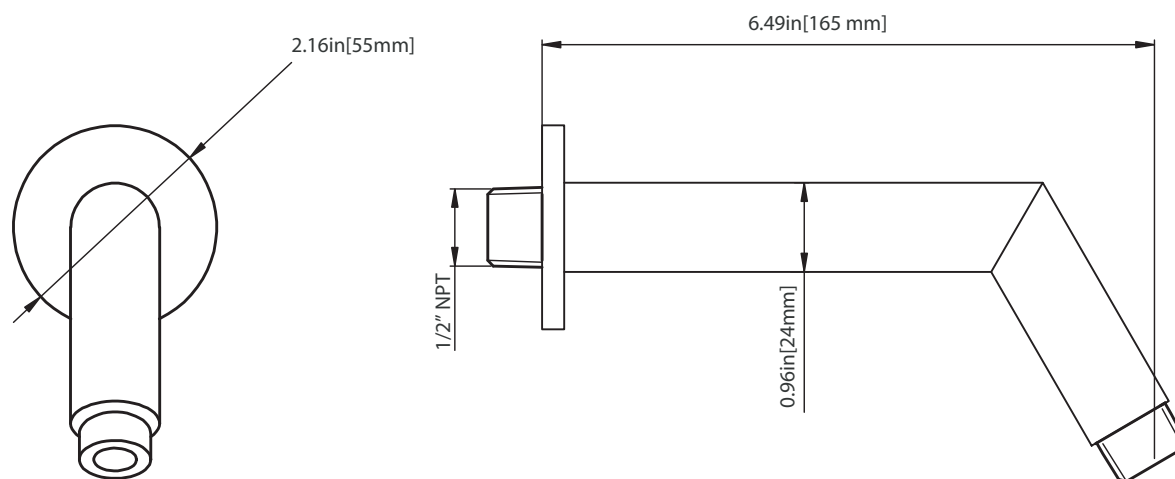


200.6140 | 120mm Multi Function Shower Head

SPECIFICATIONS:

- ABS Construction
- Scrub rubber nozzles to easily clean water sediment
- 1.8 GPM Flow Rate
- 6-function flow

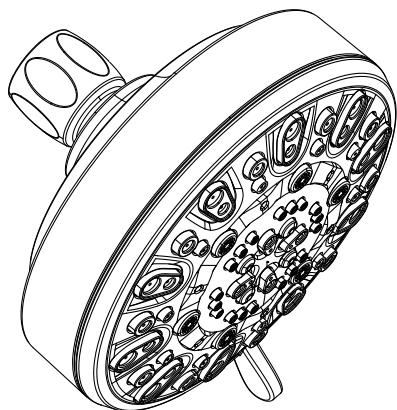

Technical Diagram

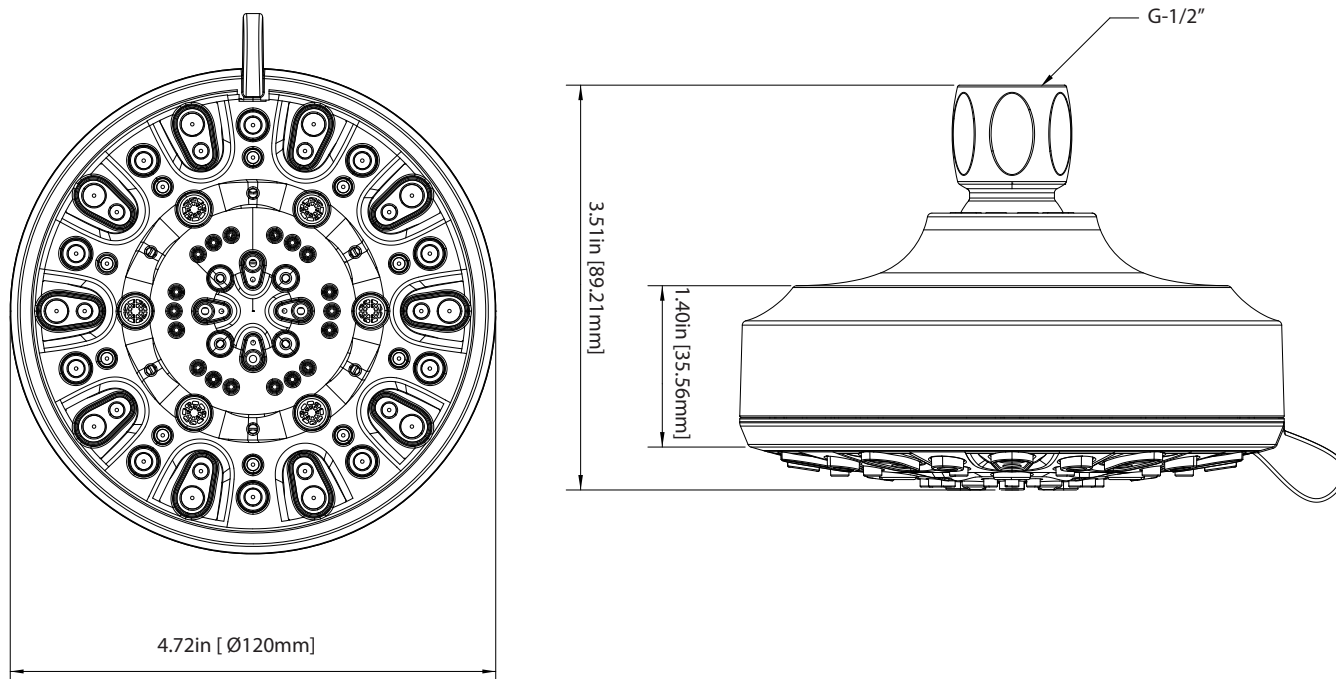

UF.2200 | 1-Way Shower Trim Set With Pressure Balance Valve




SPECIFICATIONS:


- Solid Brass Trim & Handle set
- Includes Pressure balance valve (PBV1005AS**) w/ service stops
- Lift Handle to control volume. Turn left for hot, right for cold.
- Pressure Balance Valve Flow Rate - 5.5 GPM @ 60 PSI
- Extension Available - PBV.E185**

STANDARDS:

- ASME A112.18.1 / CSA B125.1



+




Trim
[UF.2200T**]

Valve
[PBV1005AS]

Technical Diagram

See Spec Sheet For
PBV1005AS For Detailed
Information On Valve.

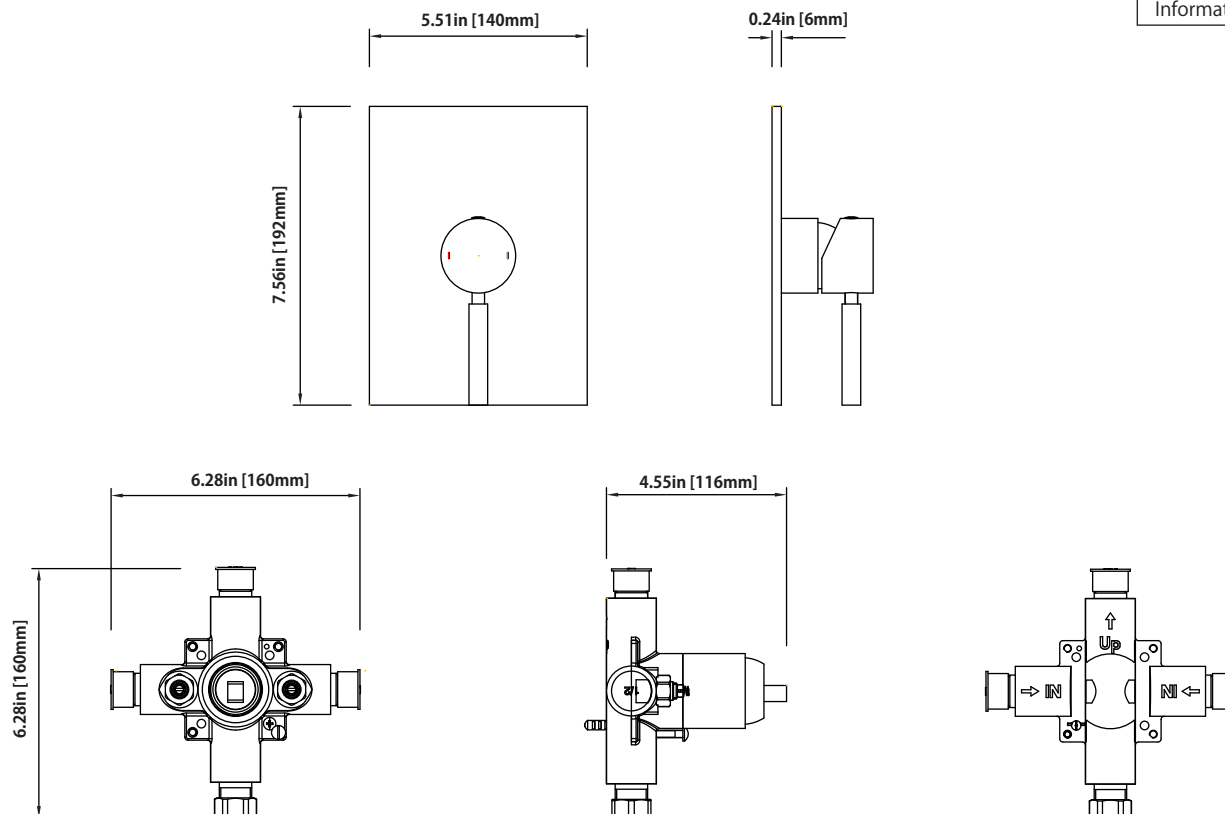

PBV1005AS | Single Control Pressure Balance Valve Page 1 of 2




SPECIFICATIONS:


- Lift Handle to control volume. Turn left for hot, right for cold.
- Pressure Balance Valve Flow Rate - 5.5 GPM @ 60 PSI
- Extension Available - PBV.E185**

STANDARDS:

- ASME A112.18.1 / CSA B125.1

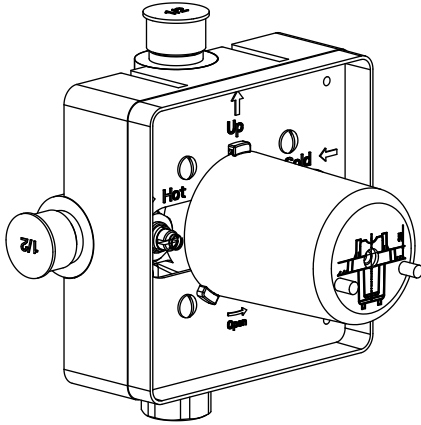

Technical Diagram

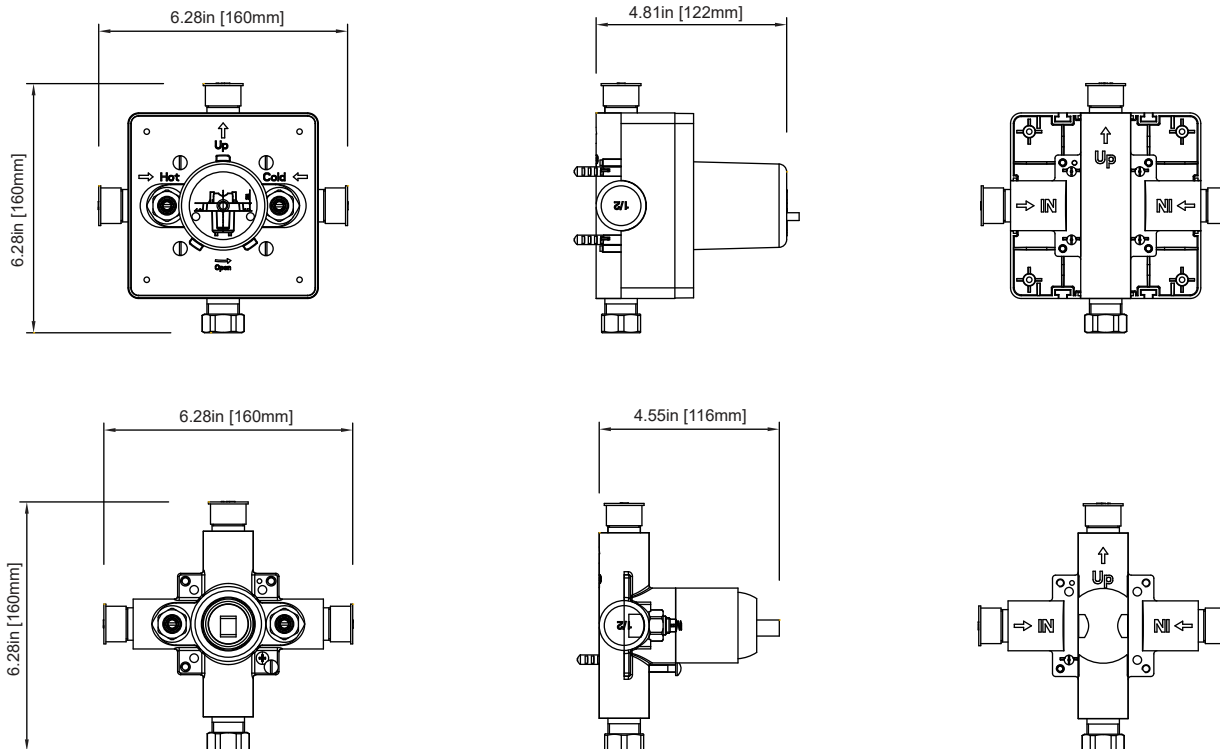

PBV1005AS | Single Control Pressure Balance Valve Page 2 of 2



Water Flow Diagram

