
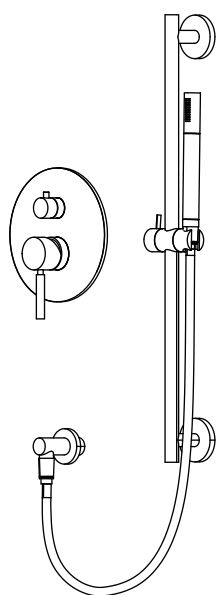


100.3360 | Two Output Shower W/ Rain Head & Hand Held



COMPONENTS

- HS1002SA - 12" Shower Arm
- HS1002A - 8" Shower Head
- UF.2102T - Shower Trim
- PBV1005A - Shower Valve
- HS1004H - Hand Held
- 100.601001A - Slidebar w/ Elbow
- Sp.150EM - 1.5m Hose
- 100.5502 - Wall Elbow

SHOWER VALVE:

- Pressure balance shower valve
- Valve includes service stops
- Lift bottom handle to control volume
- Turn left for hot, right for cold
- Top handle controls water diversion
- 1/2" NPT

SHOWER HEAD:

- Solid brass construction
- 1.8 GPM flow rate

Hand Held W/ SLIDE BAR & ELBOW:

- Solid brass construction
- Hand Held flow rate = 1.8 GPM
- 1/2" female NPT elbow connection
- With back flow prevention check valve

STANDARDS:

- ASME A112.18.1 / CSA B125.1

See individual component specification sheets on following pages for further details.