


100.4102 | 3/4" Thermostatic Valve With Volume Control & Trim

SPECIFICATIONS:

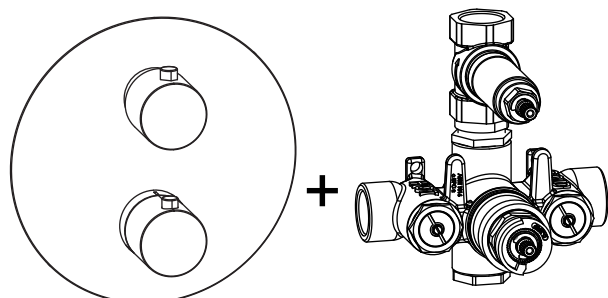



Trim
[100.4001T**]

Valve
[TVH.4101]

- Turn bottom handle to control temperature
- Turn top handle to control volume
- Includes Thermostatic valve (TVH.4101) w/ service stops
- Thermostatic Valve Flow Rate - 13.0 GPM @ 60 PSI
- Extension Available - TVH.4101E**

Technical Diagram

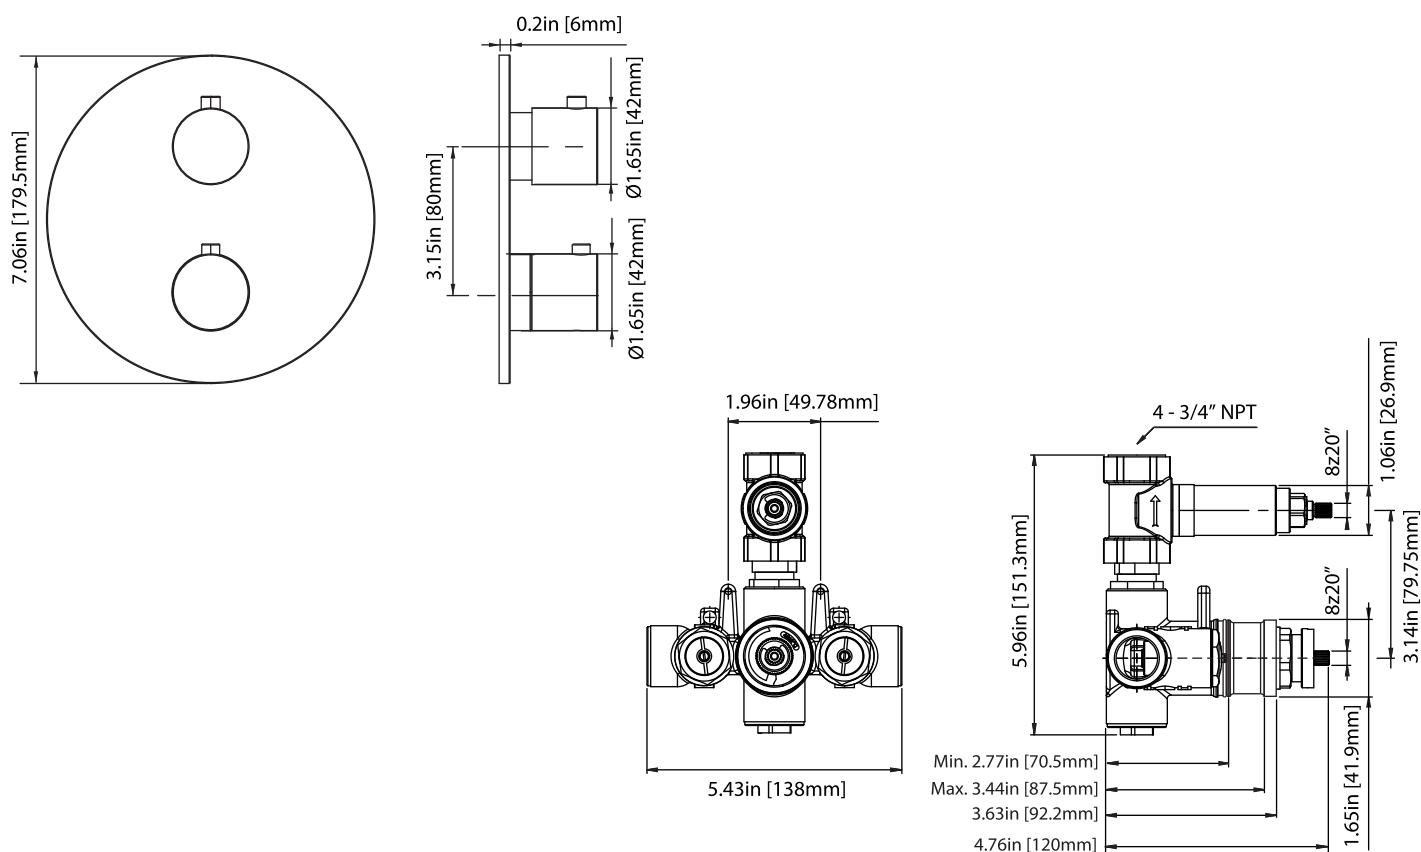



- Turn bottom knob to control temperature.
- Turn top knob to control water flow.
- Thermostatic Valve Flow Rate - 13.0 GPM @ 60 PSI
- Extension Available - TVH.4101E**

- ASME A112.18.1 / CSA B125.1

1.96in [49.78mm]

5.43in [138mm]

4 - 3/4" NPT

5.96in [151.3mm]

3.14in [79.75mm]

1.65in [41.9mm]

Min. 2.77in [70.5mm]

Max. 3.44in [87.5mm]

3.63in [92.2mm]

4.76in [120mm]

Note: Pre-Installed cap cannot be removed unless a separate volume control or diverter is purchased

TVH.4101 | 3/4" Thermostatic Valve With Volume Control Page 2 of 2



Water Flow Diagram

