


## 270.2740 | 3/4" Thermostatic Valve With 2-Way Diverter & Integrated Volume Control & Trim

### SPECIFICATIONS:

- Turn bottom knob to control temperature.
- Turn top knob to control water flow.
- Thermostatic Valve Flow Rate - 8.0 GPM @ 60 PSI
- Extension Available - TVH.4101E\*\*
- 2 Output

### STANDARDS:


- ASME A112.18.1 / CSA B125.1

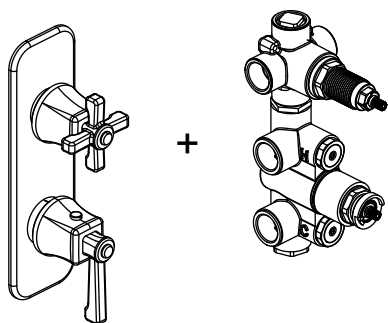

Trim [270.4000VT\*\*]


Valve [TVH.2717F]

### Technical Diagram

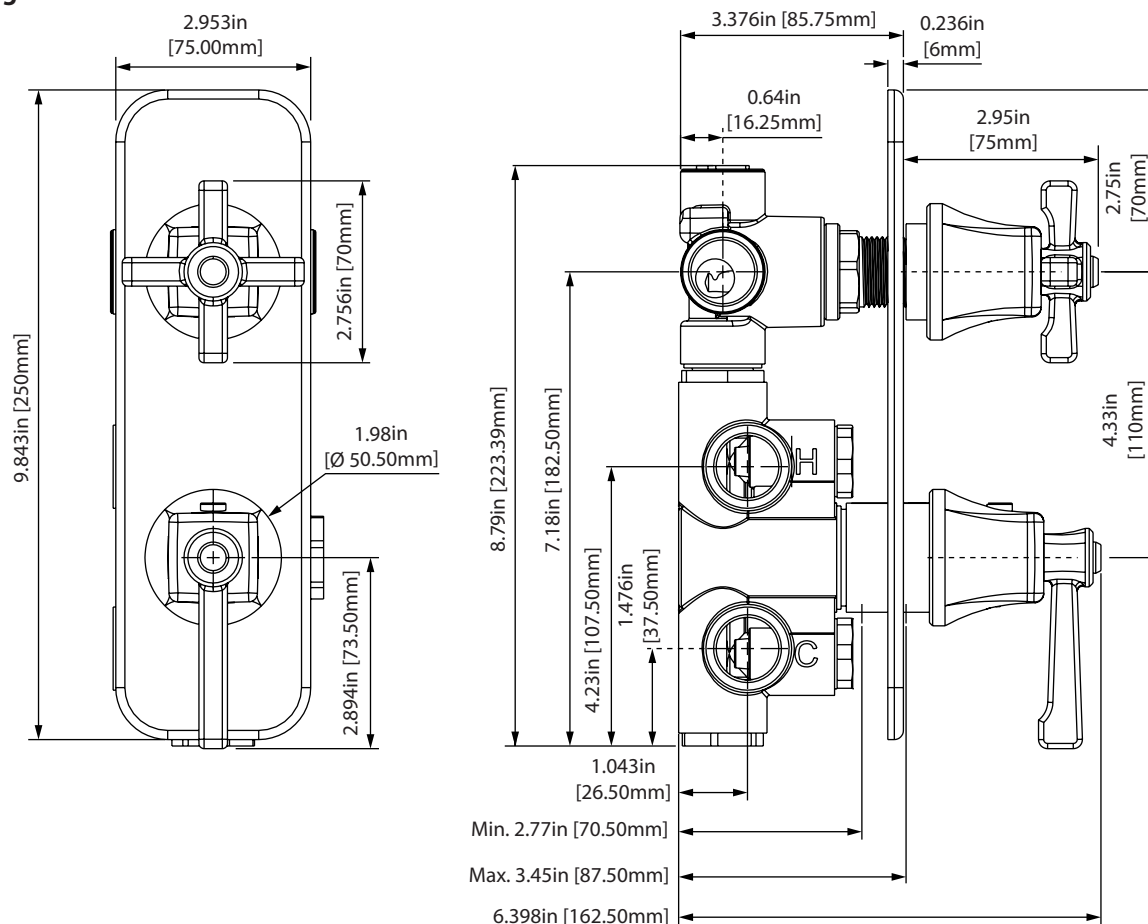

**TVH.2717F | 3/4" Thermostatic Valve With 2-Way Diverter & Integrated Volume Control** Page 1 of 2

Page 1 of 2

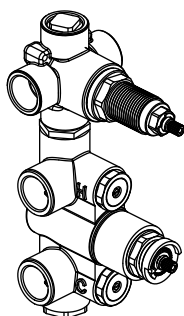

**SPECIFICATIONS:**

- Turn bottom knob to control temperature.
- Turn top knob to control water flow.
- Thermostatic Valve Flow Rate - 8.0 GPM @ 60 PSI
- Extension Available - TVH.4101E\*\*


**STANDARDS:**

- ASME A112.18.1 / CSA B125.1




A separate volume control is **not** needed to turn water supply off. Volume control functionality is integrated within this valve.


### Technical Diagram

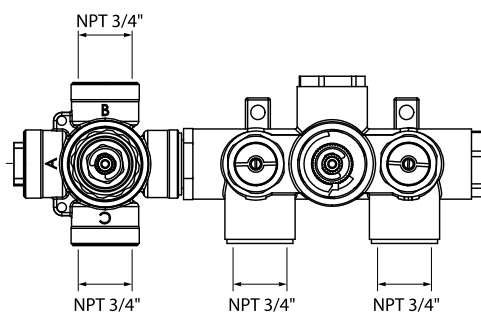

**Note:** Pre-Installed cap cannot be removed

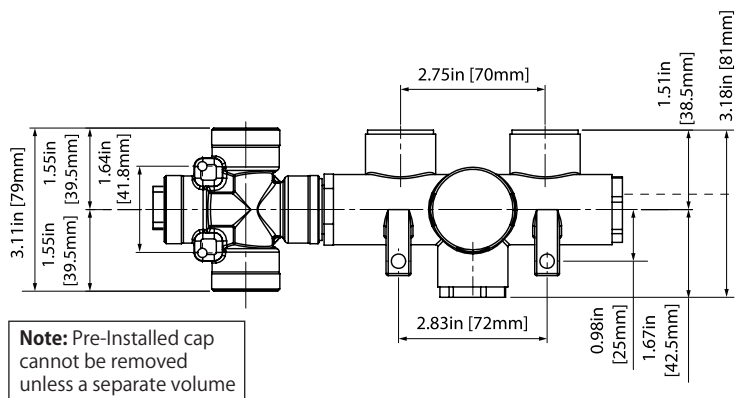

**Note:** Pre-Installed cap cannot be removed unless a separate volume control or diverter is used

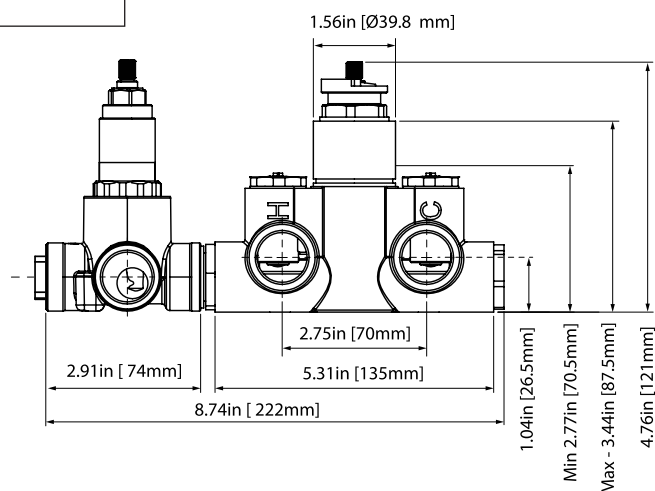

## TVH.2717F | 3/4" Thermostatic Valve With 2-Way Diverter & Integrated Volume Control

Page 2 of 2




### TWO OUPUT - CAL-GREEN - NO SHARED PORT OPERATION

Diverter Cartridge # - **15109** (Included)

Total 3 Positions as defined below, with **only** 1 port active at one time.

- Position 0 - Off - No Water Flow
- Position 1 - Output B Activated
- Position 2 - Output C Activated

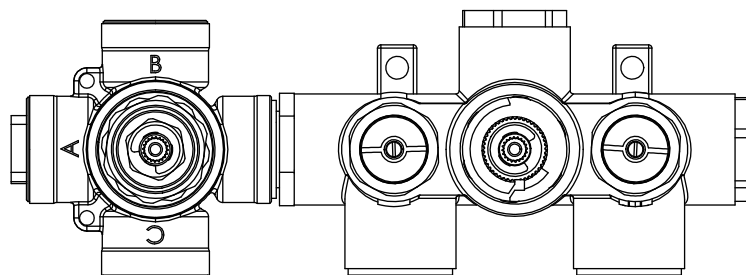

### TWO OUPUT - SHARED PORT OPERATION

Diverter Cartridge # - **15103** (Not Included)

Total 4 Positions as defined below, with 2 ports active at one time.

- Position 0 - Off - No Water Flow
- Position 1 - Output B Activated
- Position 2 - Output B+C Activated
- Position 3 - Output C Activated