


## 270.7000 | Single Output Shower W/ Rain Head



### COMPONENTS


- RHW.7C - 7" Head w/8" Arm
- 270.4000T - Shower Trim
- TVH.4101 - 3/4" Shower Valve

### SHOWER VALVE:

- Thermostatic shower valve
- Valve includes service stops
- Turn bottom handle to set temp.
- Top handle controls water volume

### SHOWER HEAD:

- Solid brass construction
- 1.8 GPM flow rate



### STANDARDS:

- ASME A112.18.1 / CSA B125.1

See individual component specification sheets on following pages for further details.


## RHW.7C | 7" Brass Shower Head With 8" Wall Mount Shower Arm

### SPECIFICATIONS:


- Solid Brass construction
- With Swivel action
- Shower arm has sliding flange


### STANDARDS:

- ASME A112.18.1 / CSA B125.1

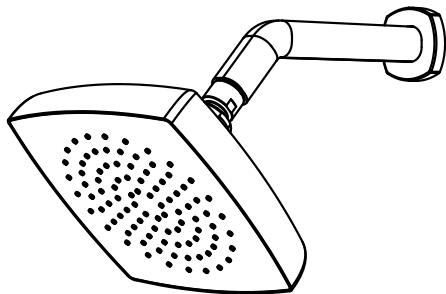


### Technical Diagram

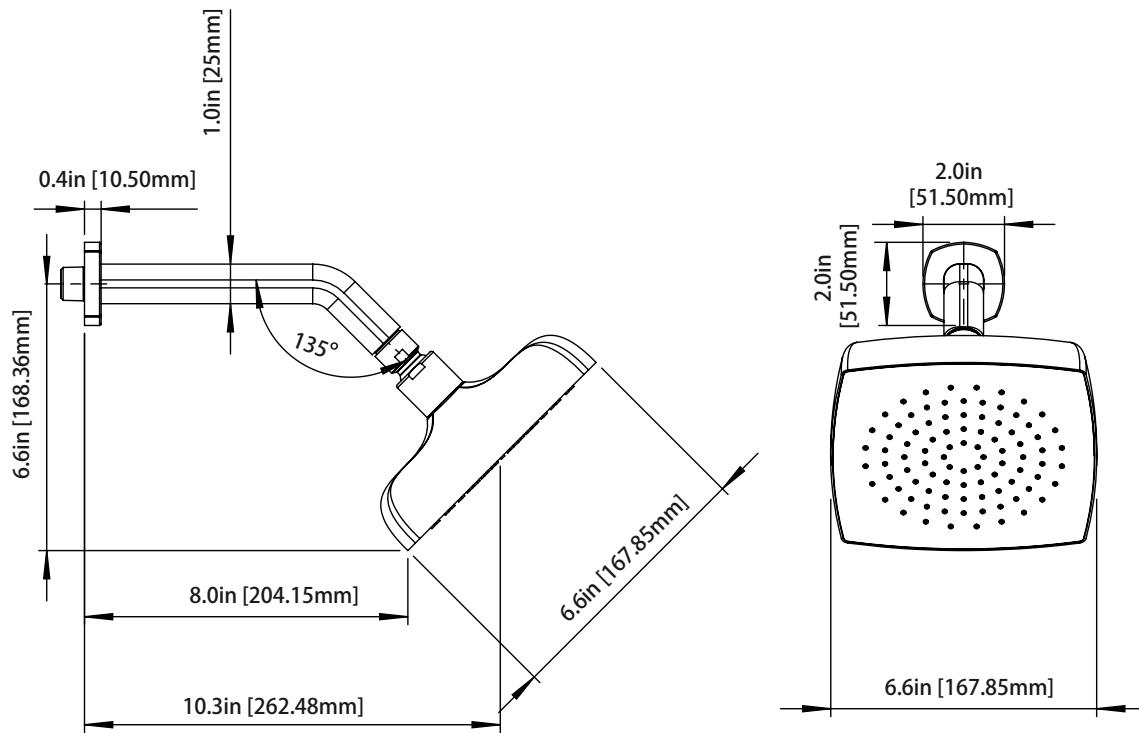

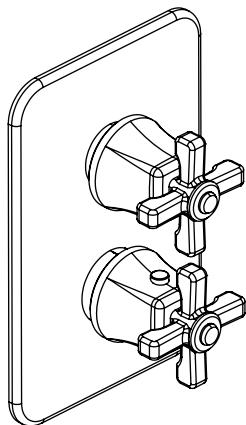**270.4000T | Thermostatic Shower Trim**

**SPECIFICATIONS:**

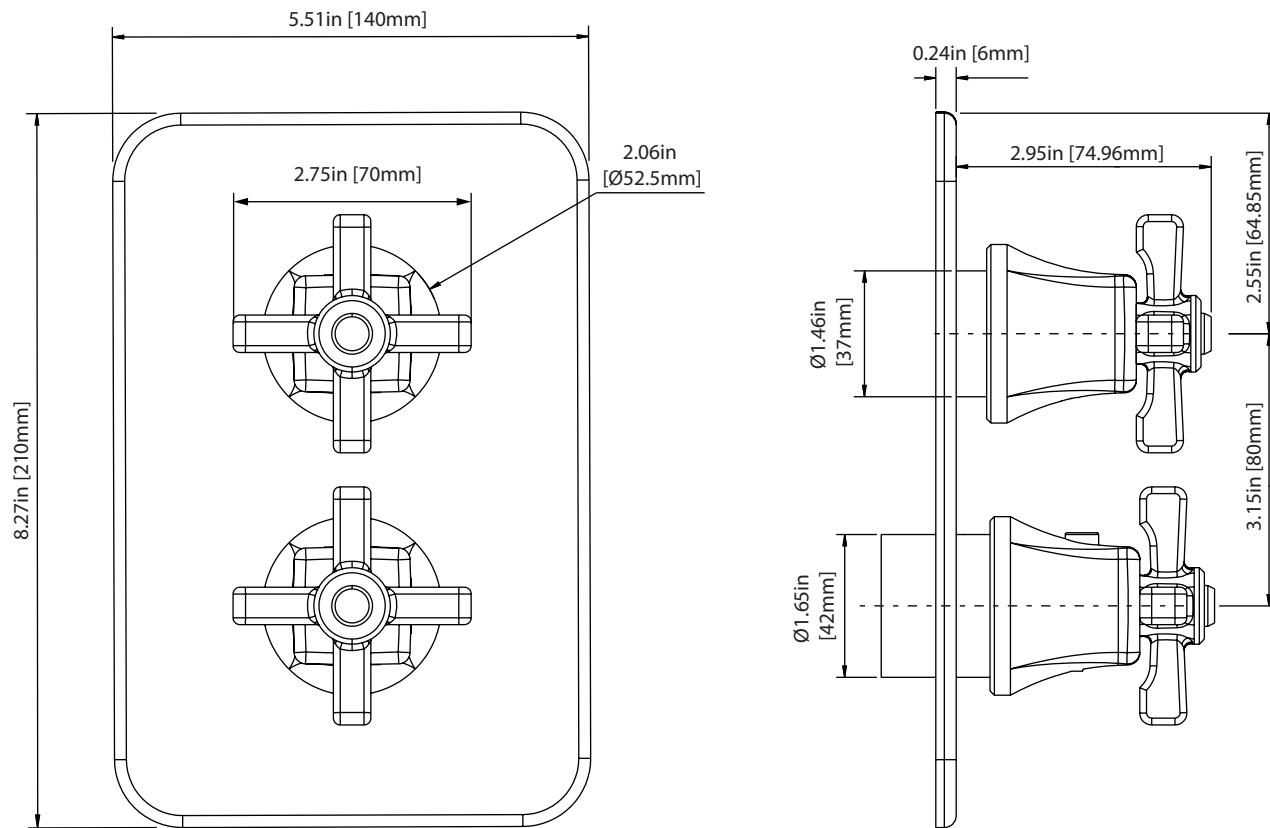- Solid Brass construction
- Valve not included - Trim only
- Bottom knob controls temperature
- Top knob controls volume
- Use in tub filler or shower applications


**Technical Diagram**


## TVH.4101 | 3/4" Thermostatic Valve With Volume Control

Page 1 of 2

### SPECIFICATIONS:


- Turn bottom knob to control temperature.
- Turn top knob to control water flow.
- Thermostatic Valve Flow Rate - 13.0 GPM @ 60 PSI
- Extension Available - TVH.4101E\*\*

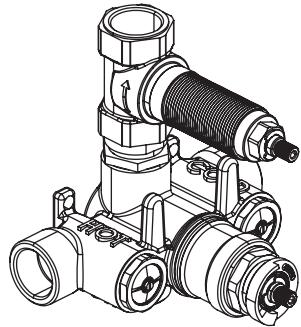

### STANDARDS:

- ASME A112.18.1 / CSA B125.1

### Technical Diagram

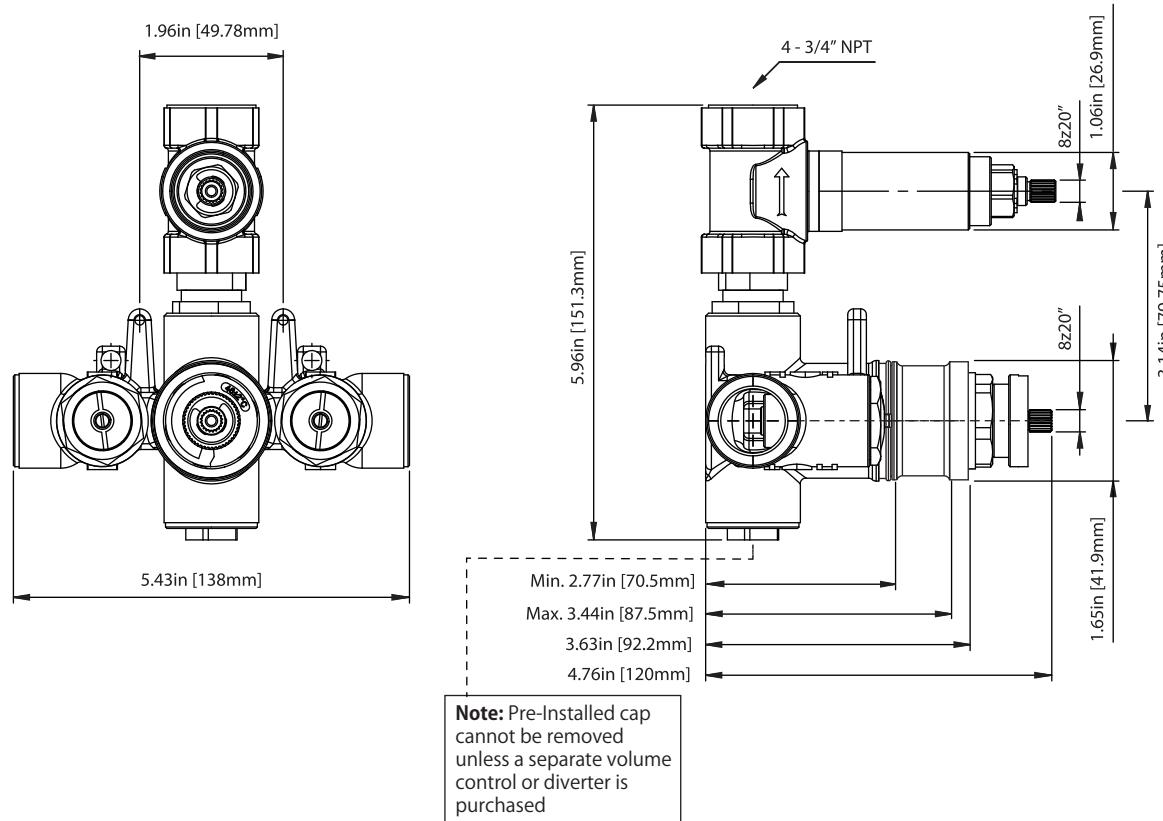

TVH.4101 | 3/4" Thermostatic Valve With Volume Control Page 2 of 2

Water Flow Diagram

