


## 270.7050 | Two Output Shower W/ Rain Head & Hand Held

### COMPONENTS

• RHW.7C	- 7" Head w/ 8" Arm
• 270.4000T	- Shower Trim
• TVH.4420F	- Shower Valve
• HS1026H	- Hand Held
• 270.8006	- Wall Elbow w/ Holder
• SP.150EM	- 1.5m Hose




### SHOWER VALVE:

- Thermostatic shower valve
- Valve includes service stops
- Turn bottom handle to set temp.
- Top handle controls water diversion
- Includes 15109 non-shared cartridge

### SHOWER HEAD:

- Solid brass construction
- 1.8 GPM flow rate

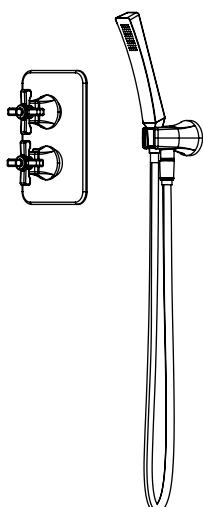

### HAND HELD:

- Solid Brass construction
- 1.8 GPM flow rate
- 1/2" female NPT connection
- With back flow prevention check valve

### STANDARDS:

- ASME A112.18.1 / CSA B125.1

See individual component specification sheets on following pages for further details.


## RHW.7C | 7" Brass Shower Head With 8" Wall Mount Shower Arm

### SPECIFICATIONS:


- Solid Brass construction
- With Swivel action
- Shower arm has sliding flange

### STANDARDS:


- ASME A112.18.1 / CSA B125.1

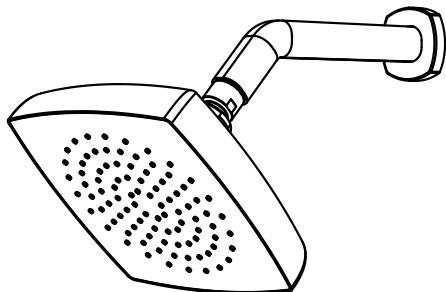

### Technical Diagram

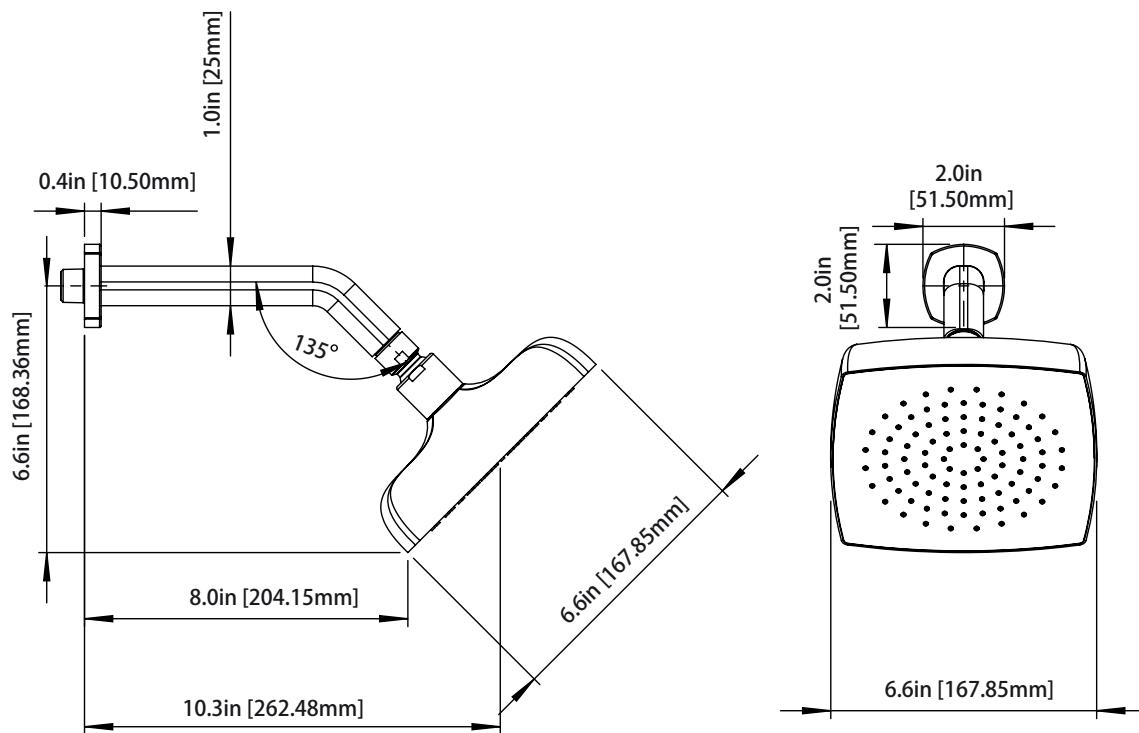


## 270.4000T | Thermostatic Shower Trim

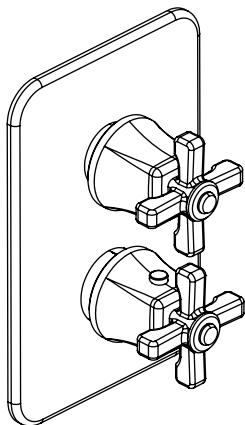

### SPECIFICATIONS:

- Solid Brass construction
- Valve not included - Trim only
- Bottom knob controls temperature
- Top knob controls volume
- Use in tub filler or shower applications

### Technical Diagram

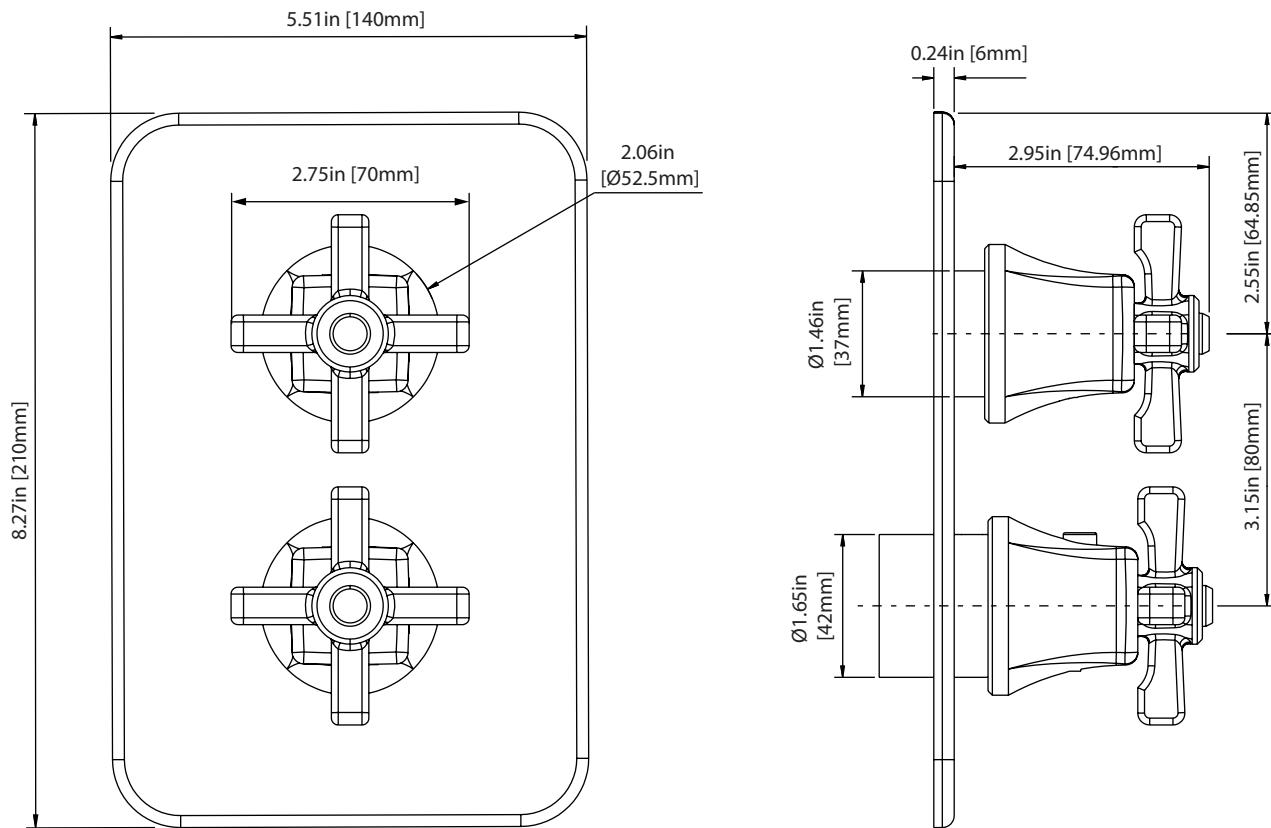

## TVH.4420F | 3/4" Thermostatic Valve With 2-Way Diverter & Integrated Volume Control

Page 2 of 2




### SPECIFICATIONS:

- Turn bottom knob to control temperature.
- Turn top knob to control water flow.
- Thermostatic Valve Flow Rate - 8.0 GPM @ 60 PSI
- Extension Available - TVH.4101E\*\*


### STANDARDS:

- ASME A112.18.1 / CSA B125.1

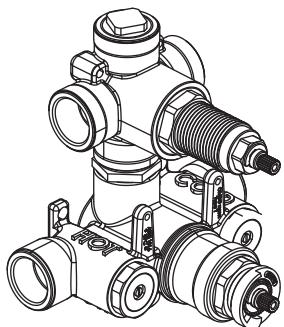

A separate volume control is **not** needed to turn water supply off. Volume control functionality is integrated within this valve.

### Technical Diagram

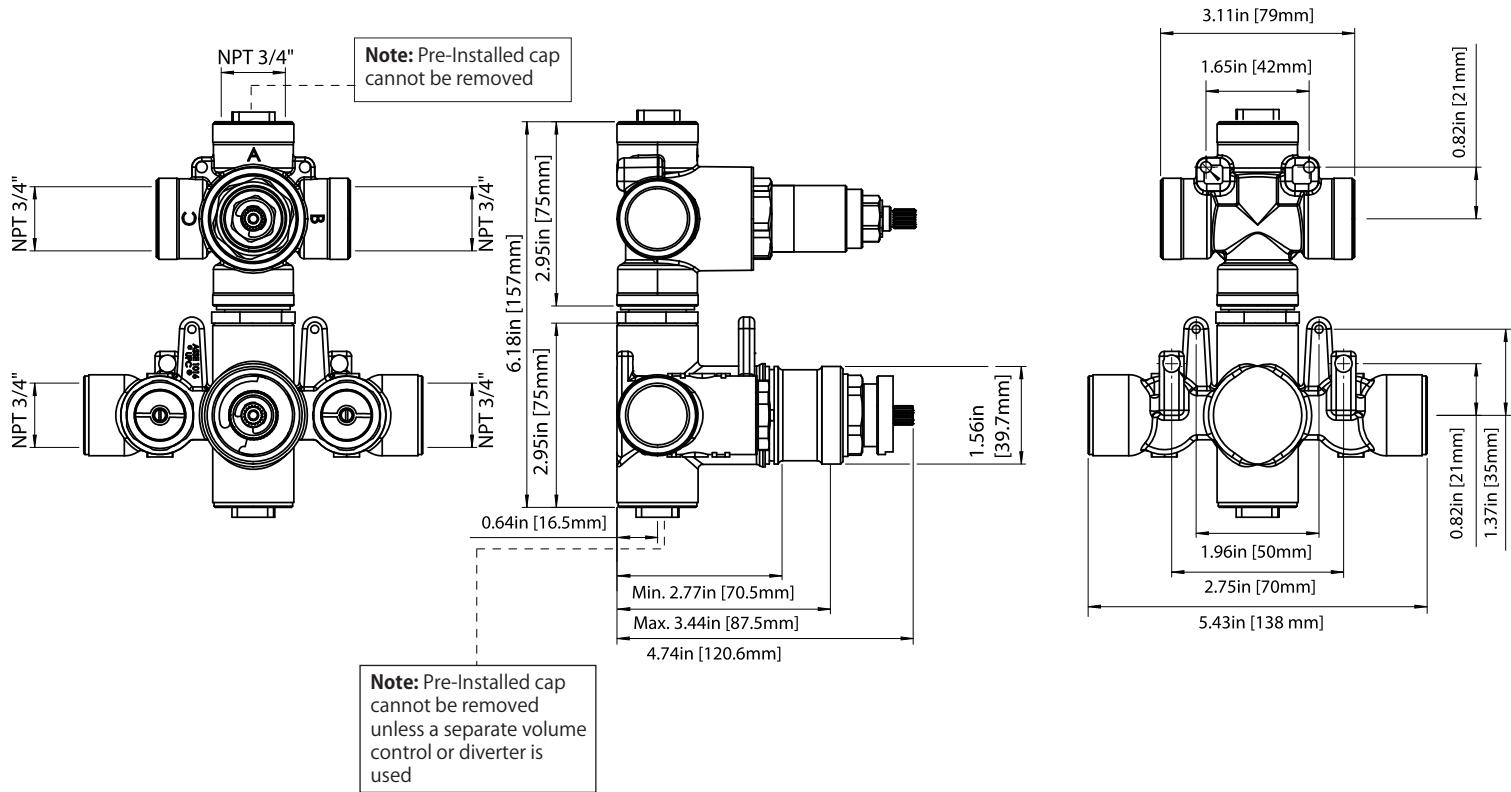

TVH.4420F | 3/4" Thermostatic Valve With 2-Way Diverter & Integrated Volume Control Page 2 of 2




#### **TWO OUTPUT - CAL-GREEN - NO SHARED PORT OPERATION**

Diverter Cartridge # - **15109** (Included)

Total 3 Positions as defined below, with **only** 1 port active at one time.

- Position 0 - Off - No Water Flow
- Position 1 - Output B Activated
- Position 2 - Output C Activated

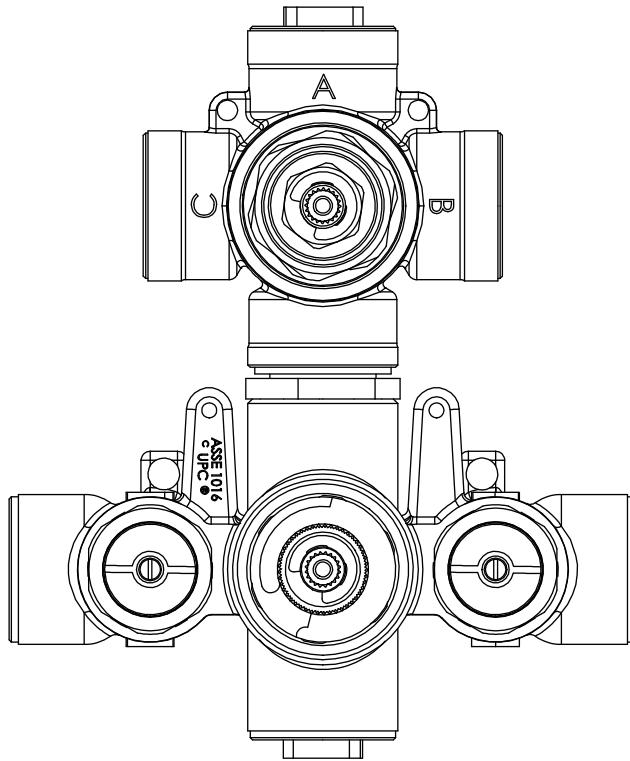


## **TWO OUTPUT - SHARED PORT OPERATION**

Diverter Cartridge # - **15103** (Not Included)


Total 4 Positions as defined below, with 2 ports active at one time.

- Position 0 - Off - No Water Flow
- Position 1 - Output B Activated
- Position 2 - Output B+C Activated
- Position 3 - Output C Activated

## Water Diversion Diagram

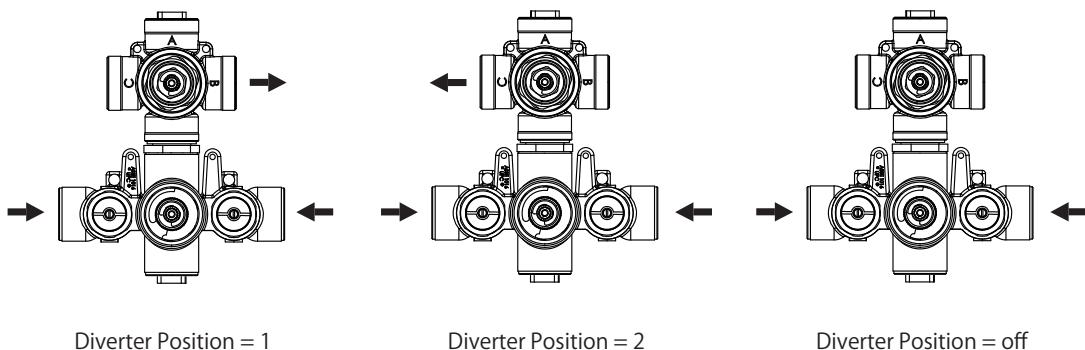


## HS1026H | Solid Brass Hand Shower

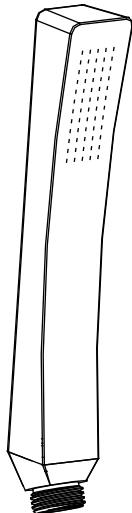

## SPECIFICATIONS:




- Solid Brass Construction
- 1.8 GPM Flow Rate
- With back flow prevention check valve


## Technical Diagram

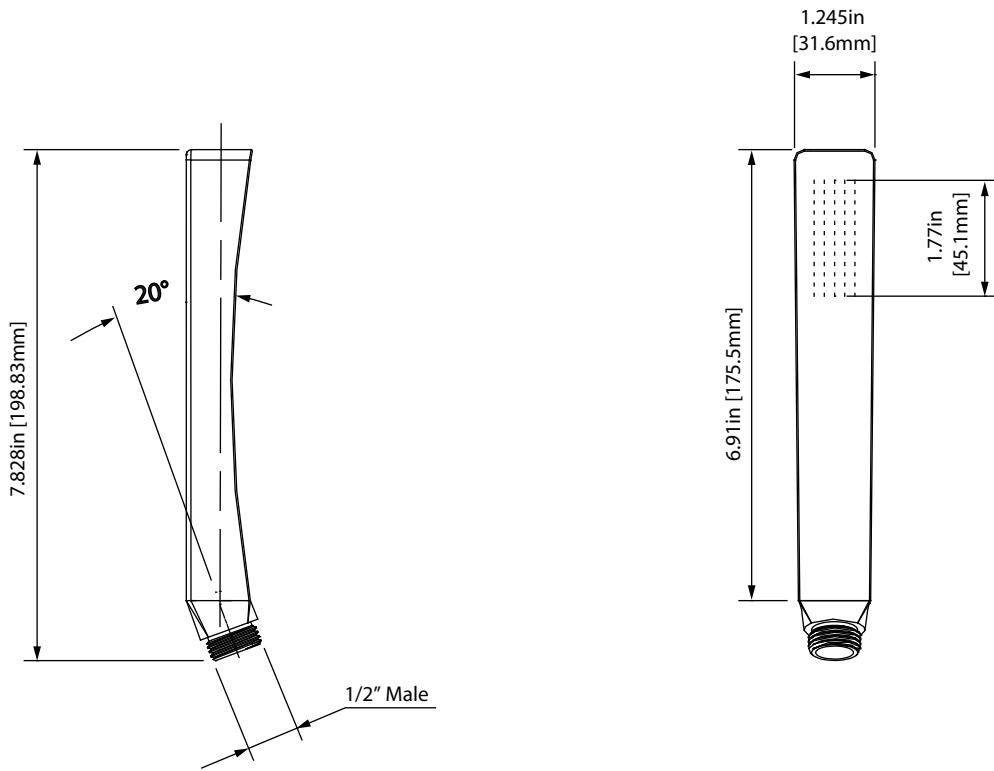

**270.8006 | Wall Elbow With Holder Combo****SPECIFICATIONS:**

- Solid Brass Construction
- Includes Check Valve with back flow prevention.

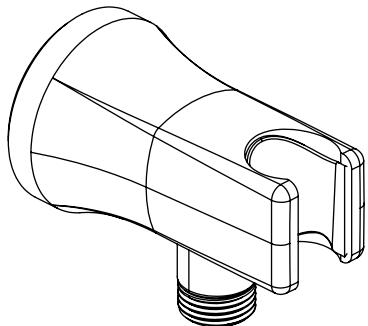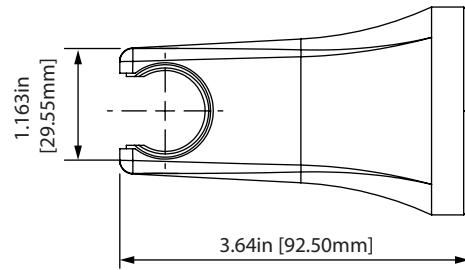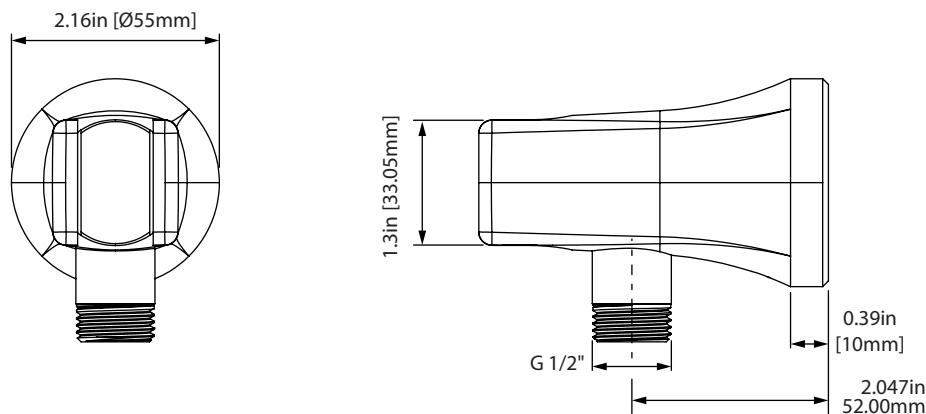**Technical Diagram**

**SP.150EM | Easy Maneuver Hose****SPECIFICATIONS:**

- Stainless steel construction
- G-1/2" Connection
- 1.5m Length

**Technical Diagram**