


Installation Manual For CFB.2450

Waterfall / Cascade Flow Tub Filler

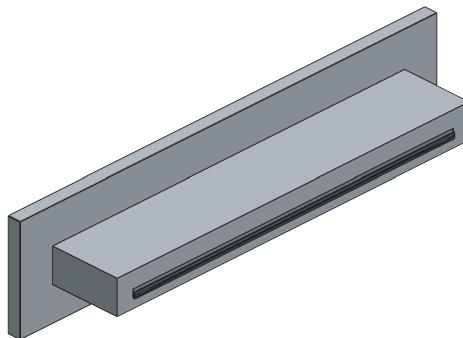

NOTICE TO HOMEOWNER

- We recommend that this product is installed by a qualified professional plumber.
- Please check this product immediately to ensure that it has not been damaged and is complete. Before installation, please make sure this product is the correct model and you have all the parts required for installation and use.
- Please flush the water system to ensure that no metal swarf, solder, and other impurities can enter the product.
- Turn off water supply before commencing work.
- Please read these instructions carefully and retain for future reference.

BEFORE YOU BEGIN


- You must observe all local plumbing laws and codes.
- Do not install this valve if it does not meet local plumbing codes.
- Shut off the main water supply.

Installation Manual For CFB.2450

Waterfall / Cascade Flow Tub Filler

TABLE OF CONTENTS

• In The Box	1
• Operating Specifications	1
• Technical Drawing	2
• Installation Hole Spacing Guide	2
• Installation Procedure	3
• Cleaning	5

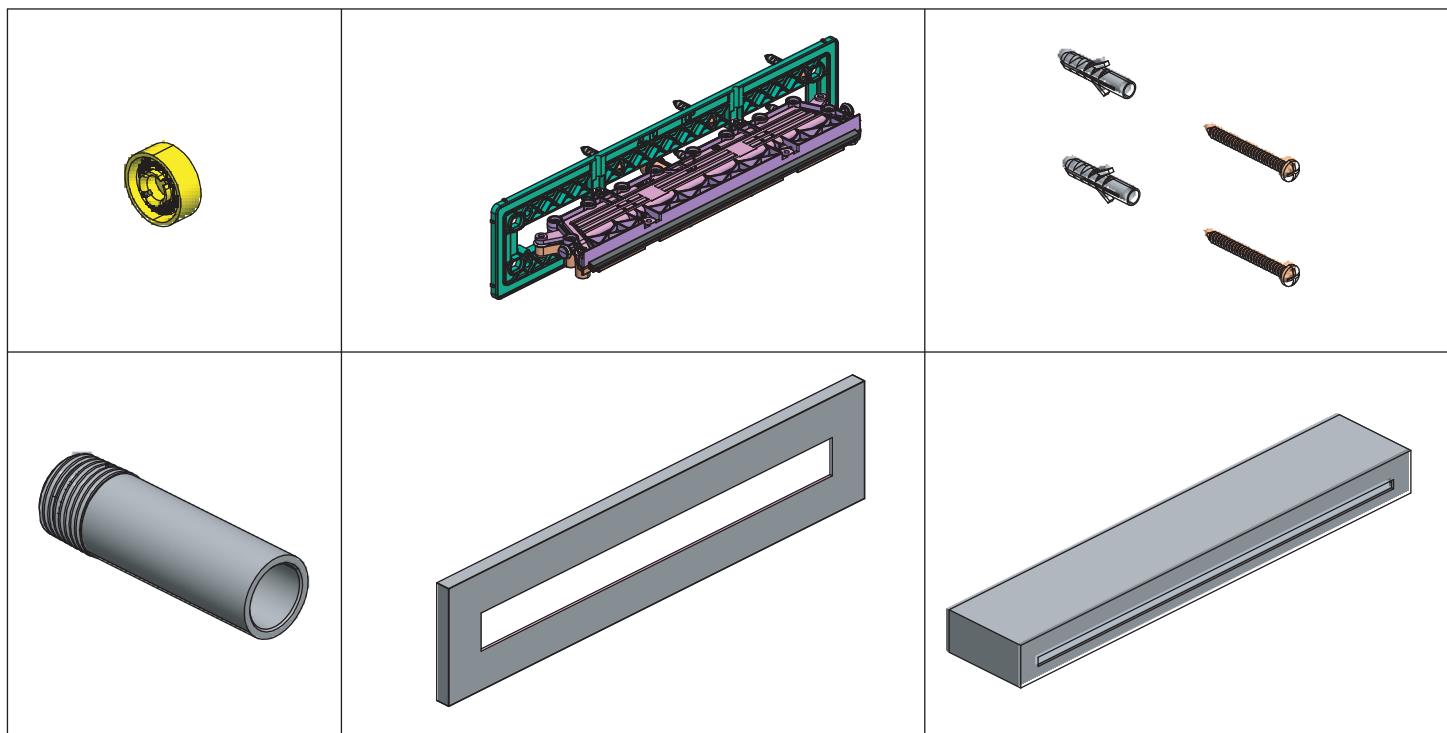
IN THE BOX**OPERATING SPECIFICATIONS****WATER TEMPERATURE**

This product is to be used with water at a temperature range of 40°F - 120°F ONLY!

WATER PRESSURE


This product is to be used with a water pressure range of 15 PSI to 72 PSI ONLY
If water pressure is greater than 72 PSI install a pressure reducing valve (PRV)

TECHNICAL DRAWING

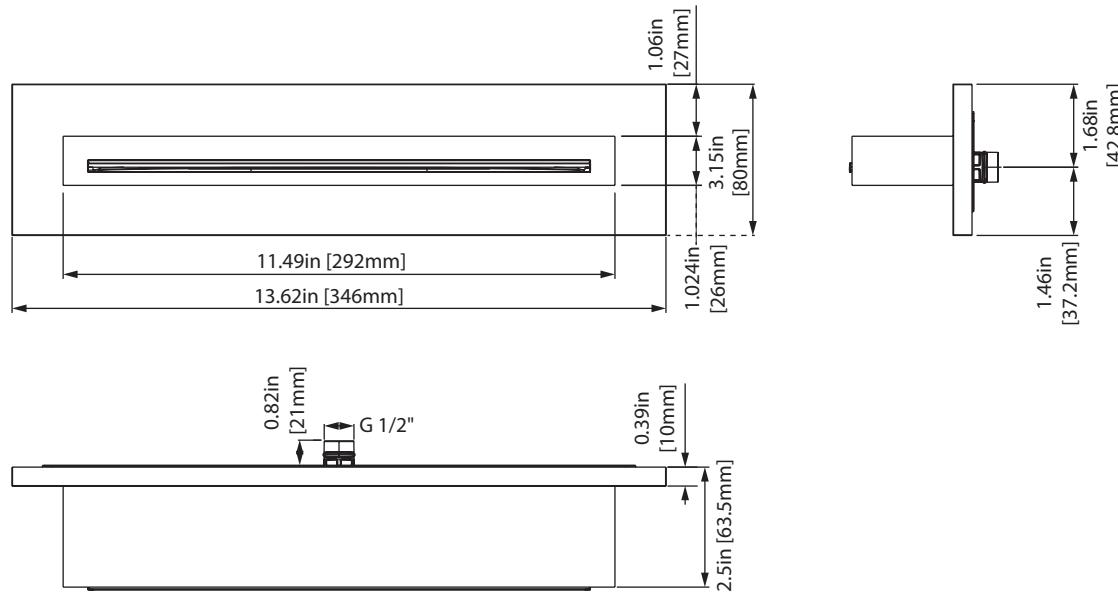


INSTALLATION HOLE SPACING GUIDE

The CFB.2450 installs from front of the finished tile. It is secured with 8 screws. The below diagram shows hole spacing.

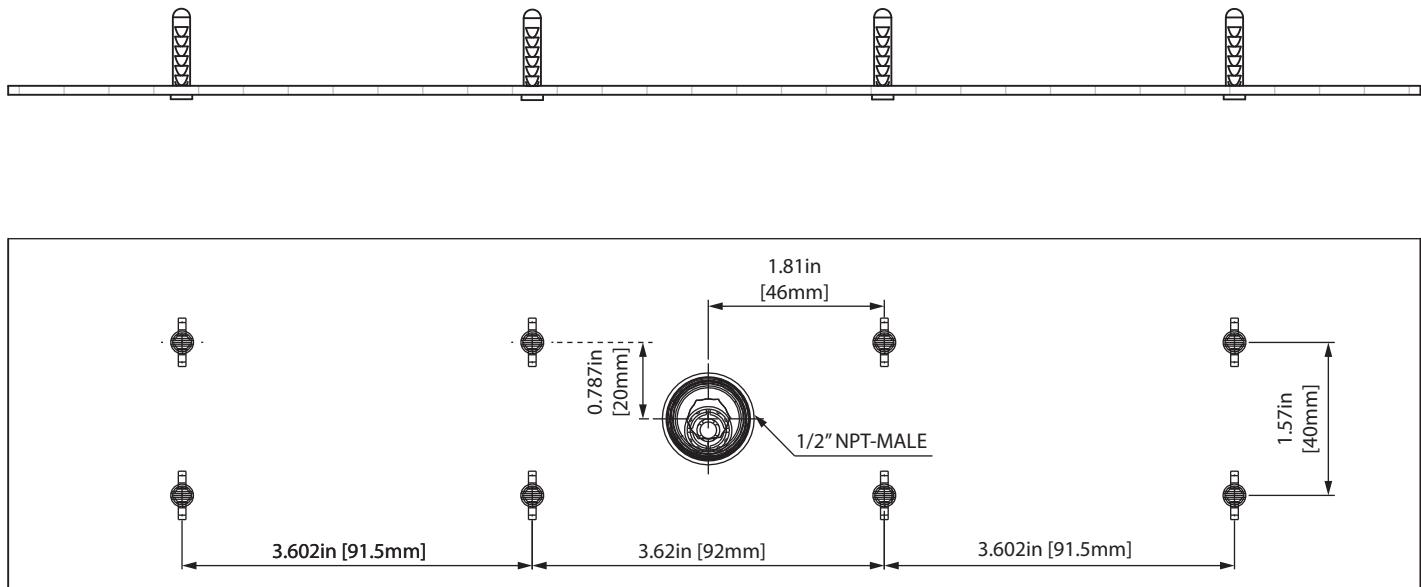


Critical Dimensions in Inches [mm]


INSTALLATION PROCEDURE

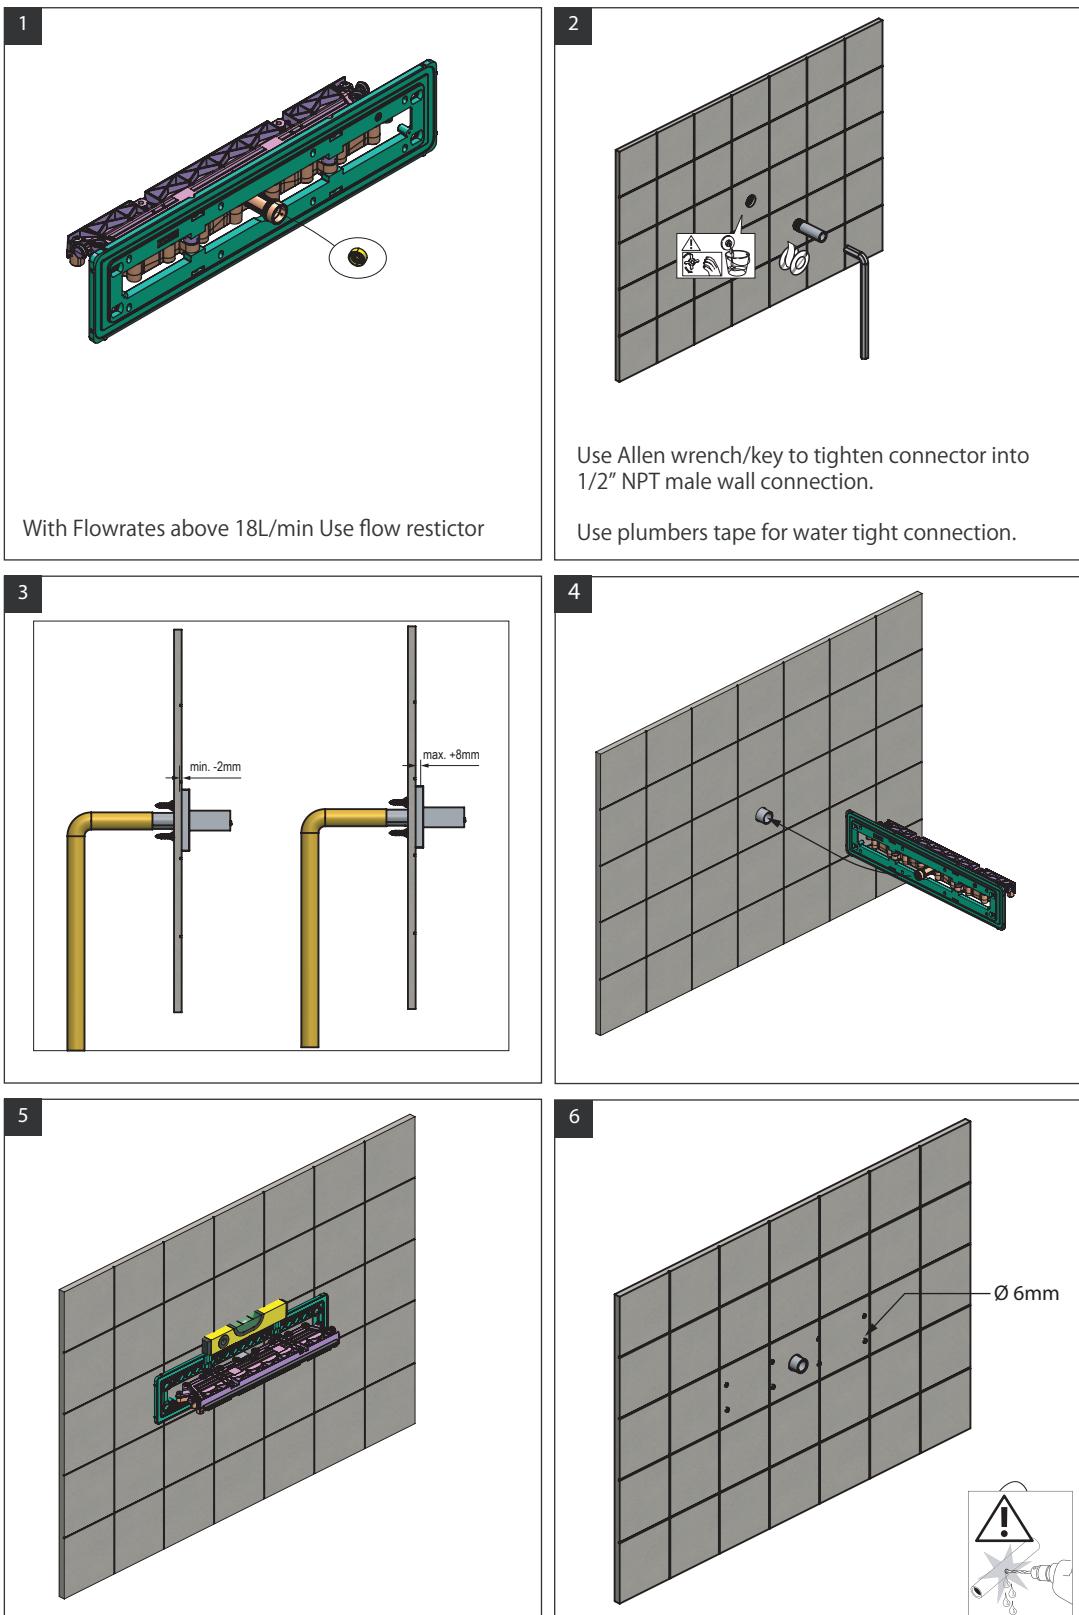

INSTALLATION PROCEDURE

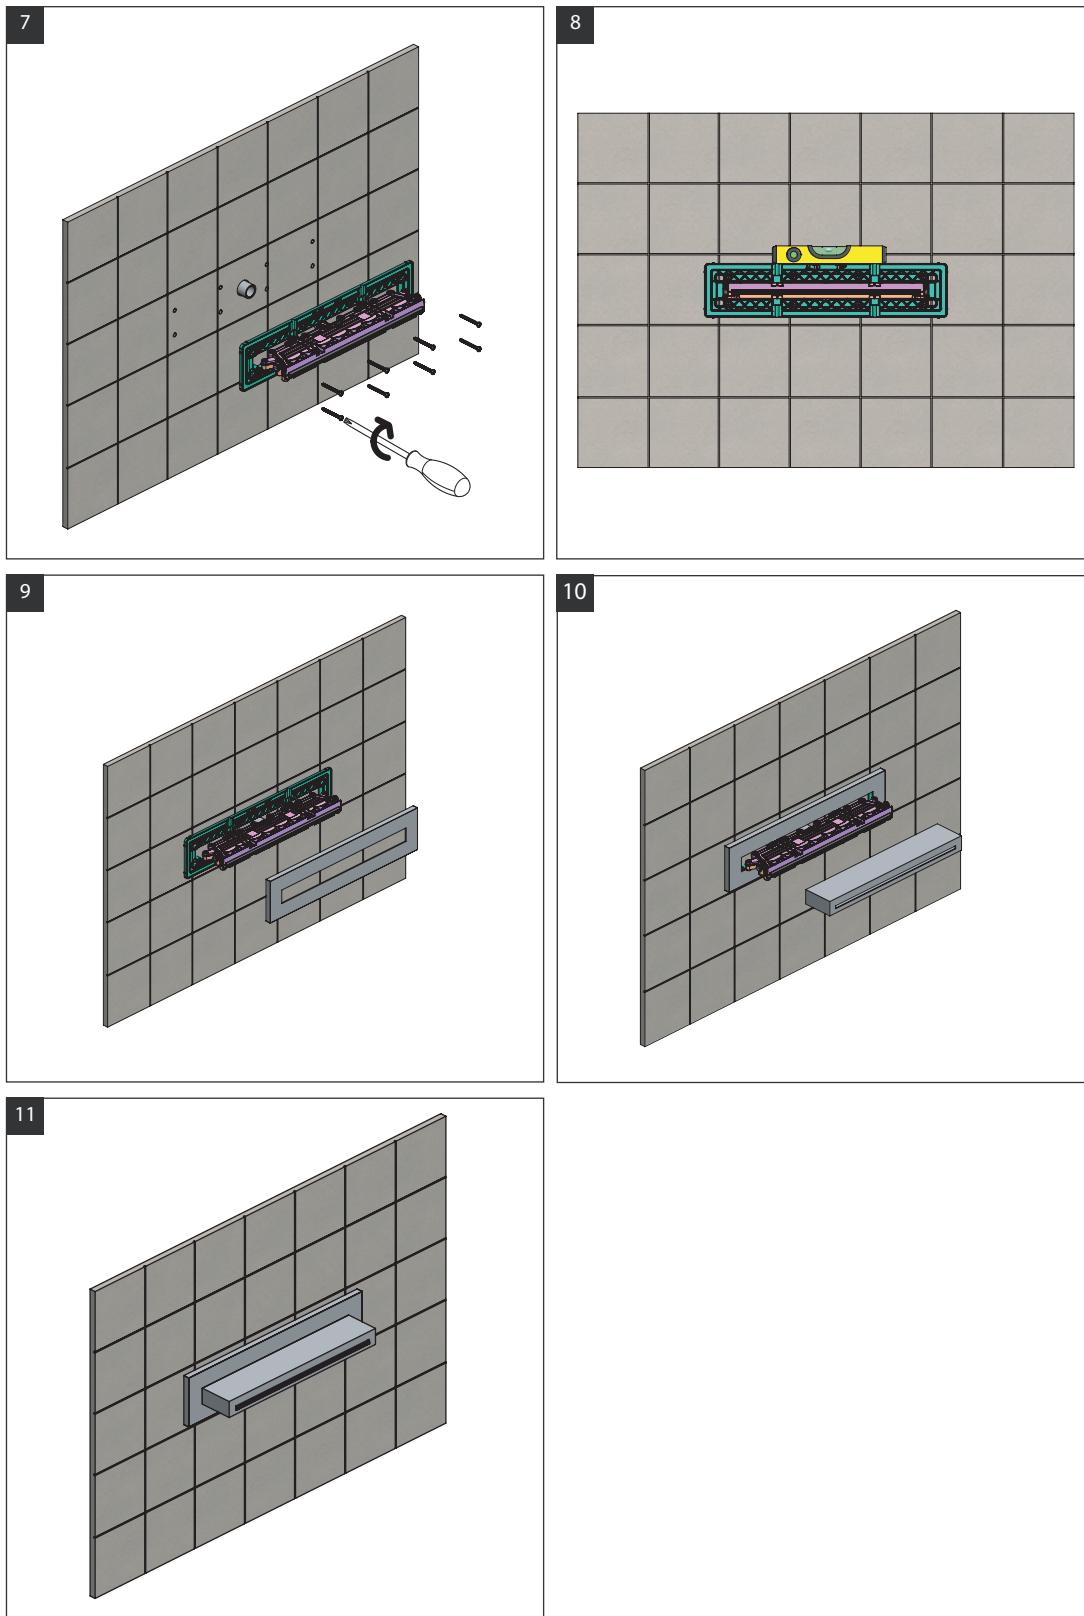

CLEANING

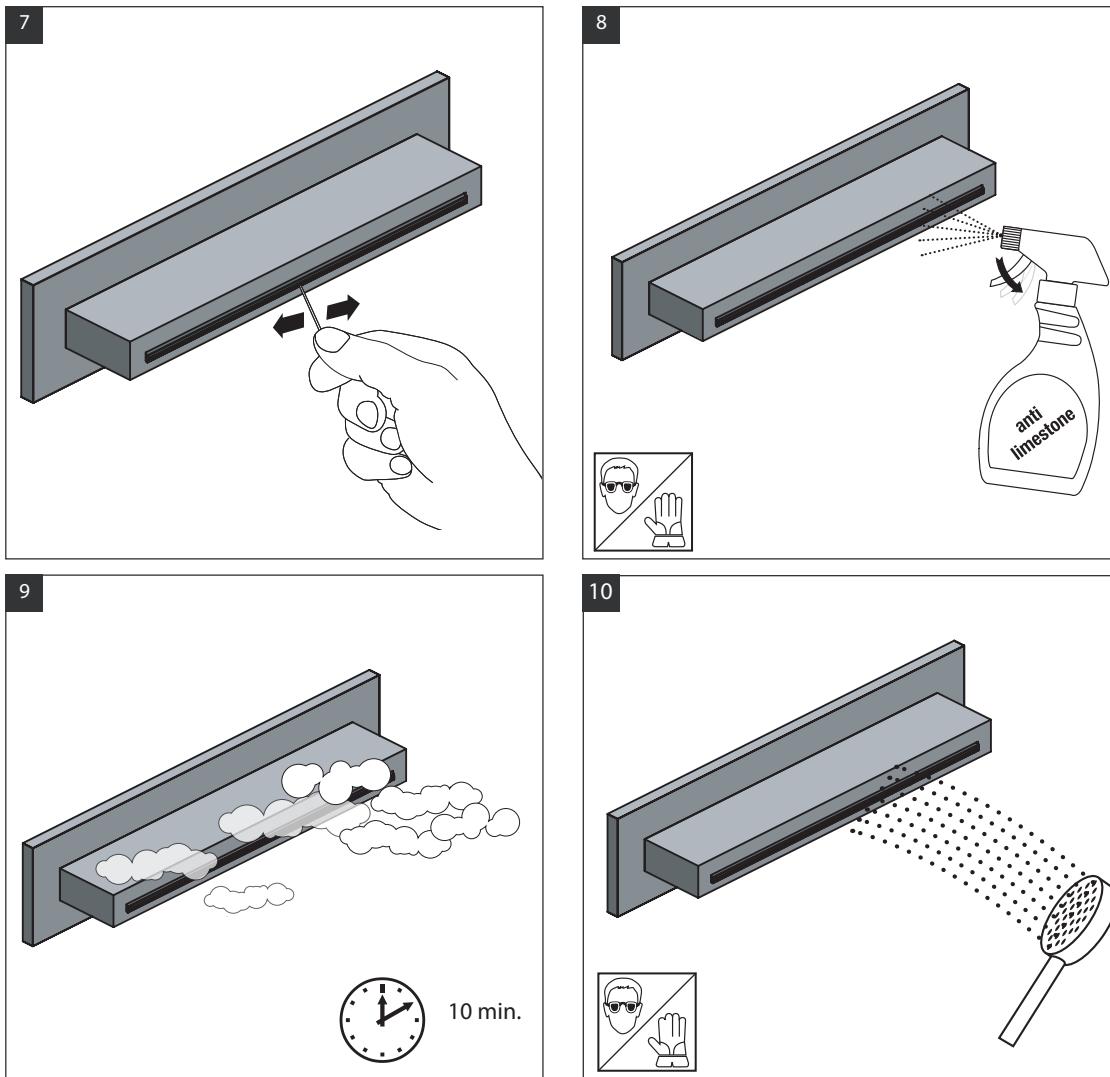

WARNING :- The use of non-recommended substances may ruin the surface permanently. In this case, the warranty is not valid.